



Color	VF(V) @20mA		IV(mcd) @20mA		Peak wave Length λP(nm) @20mA
	Typ.	Max	Typ.	Typ.	Typ
Yellow	2.1	2.6	15	30	589
Green	2.2	2.6	20	30	568

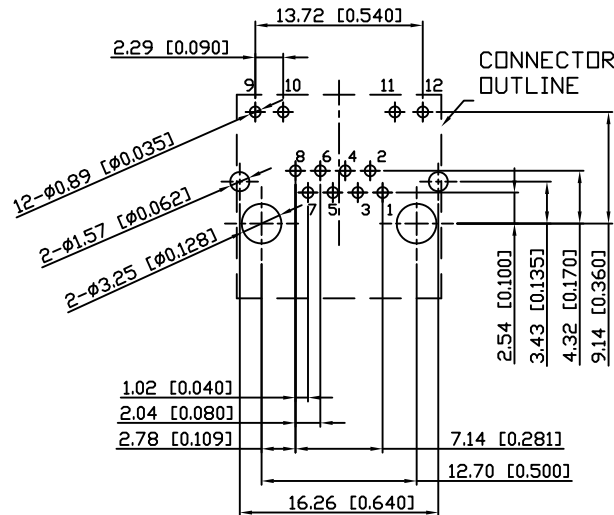


RECOMMENDED
PANEL CUTOUT DIMENSION

NOTES:

- MATERIALS:
HOUSING: HIGH TEMP. THERMOPLASTIC, PBT, UL 94V-0, BLACK
CONTACTS: T=0.35 mm PHOSPHOR BORNEZE, 50u" NICKEL UNDERPLATE ON ALL AREA, 100u" TIN ON TERMINATION END, 15u" GOLD ON CONTACT AREA.
SHIELD: T=0.25 mm COPPER ZINC ALLOY PLATED WITH NICKEL
- OPERATING TEMPERATURE: -40°C ~ +85°C
- JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F
- UNSPECIFIED TOLERANCE: .XX ±0.25[0.010]
.X ±0.30[0.012]

SUGGESTED PCB LAYOUT
(TOP VIEW)
DIMENSIONAL TOLERANCE: .XX ±0.08[0.003]

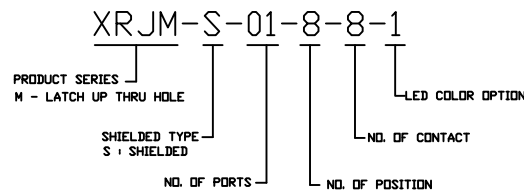

RoHS Compliant

Kinnex[®]A

KINNEXA, INC.
4F, No. 347, Yang Guang St.,
Neihu, Taipei, Taiwan 11491

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWG NO: XRJM-S-01-8-8-1
TITLE: RJ45 Connectors, W/LED, 8P,8C, Shielded, Thru-Hole			DRAWN: NINA
PART NO: XRJM-S-01-8-8-1			CHKD: TRAR
UNIT mm[inch]	SHEET 1 of 1	REV F	DATE: Oct.19,12